


723FG(E)

SPRASOLVO®

APPLICATION AREAS

- Nuts
- Bolts
- Caps
- Screws
- Washers

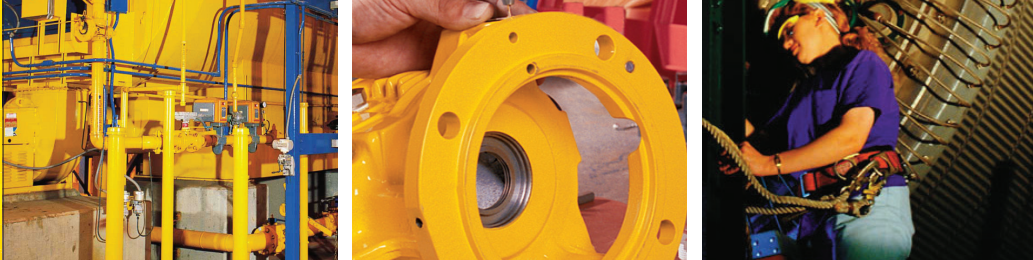

PRODUCT DATA SHEET

KEY FEATURES AND BENEFITS

- NSF H1 Registration Number 156781
- Conforms to FDA Standard 21CFR 172.884, 178.3620 and 178.3650
- Creeps into microscopic spaces

PACKAGING

Aerosol

DIRECTIONS

Apply 723FG(E) Sprasolvo® directly from aerosol dispenser. Apply evenly and allow a minute for deep penetration.

DESCRIPTION

Chesterton® 723FG(E) Sprasolvo® is a high quality, fast acting, penetrating oil which reaches deeply in and frees frozen nuts, bolts, and fittings without injury to the base metal. Due to its excellent capillary action, 723FG(E) Sprasolvo® will reach inaccessible places other penetrants will not touch. Breakaway torque is significantly reduced as the product penetrates every bit of rust, scale or corrosion and loosens tar, grease, dirt and deposits of carbon and graphite. Most penetrating oils on the market today are designed for multiple functions - displacing moisture, protecting against corrosion, lubricating and finally, loosening rusted bolts. Unlike these other products which claim to be all things to all users, 723FG(E) Sprasolvo® was formulated to provide only one function; that of the best possible penetration. Use Chesterton 723FG(E) Sprasolvo® when a true penetrating oil is needed.

Typical Physical Properties

Appearance	Clear liquid
Specific Gravity	0.83
Odor	None
Flash Point	62°C (144°F)

Before using this product, please refer to Safety Data Sheet (SDS).